

COMFORT SERIES



Characteristic	Representative	Others
Breathability	CF-ERG-15M CF-EGR-40SR	High air flow properties due to special process. Random cell type is also available
Moisture Control	EHC-35	Offers moisture absorption and release performances, suitable for hot and humid environments
Durability	ER-26 EMO-40	Superior compression set and excellent durability
Superior Hand Feel	EFS-50 LR-40S	Moisture rich smooth texture and latex hand feel

* Note: Values are for reference only and not specified values.

* Foam Materials of INOAC CORPORATION JAPAN




EGR-40STN

Hardness 40 Apparent Density (kg/m³) 40



LR-40S

Hardness 40 Apparent Density (kg/m³) 40

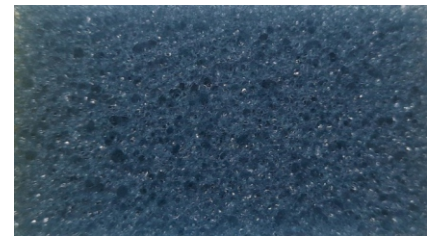

EFS-50

Hardness 55 Apparent Density (kg/m³) 55



EHC-35

Hardness 70 Apparent Density (kg/m³) 35




CF-EGR-40SR

Hardness 75 Apparent Density (kg/m³) 40



ERF-30

Hardness 100 Apparent Density (kg/m³) 30

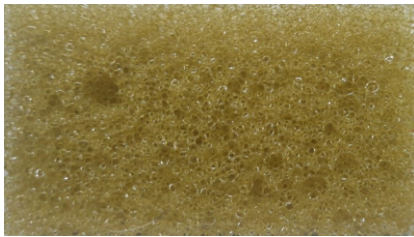

CF-ERG-15M

Hardness 110 Apparent Density (kg/m³) 40



EAH-M

Hardness 120 Apparent Density (kg/m³) 25



ER-30

Hardness 120 Apparent Density (kg/m³) 30



ER-26

Hardness 160 Apparent Density (kg/m³) 35



ERM-35

Hardness 160 Apparent Density (kg/m³) 36



UEM-55G

Hardness 170 Apparent Density (kg/m³) 55




HRS-50

Hardness 200 Apparent Density (kg/m³) 53



ERM-35H

Hardness 205 Apparent Density (kg/m³) 36

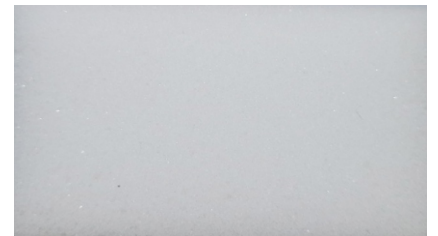

EMO-40

Hardness 370 Apparent Density (kg/m³) 40

DK GMPack
Good material & packaging

SUPPORTING INDUSTRY PRODUCTS AND PACKAGING

20, Lot H2 11, 12 XN1A road, Hoa Phu Ward, Thu Dau Mot City, Binh Duong Province, Vietnam
0901 659 078 (Mr. Vinh) - info@gmpack.net - gmpack.net

